

SPECIFICATIONS

Product Features:

- ◆ Input Voltage Range:100~277VAC;
- ◆ High Power Factor;
- ◆ Efficiency Up to 87%;
- ◆ Meet UL8750 UL1310 CB CE;
- ◆ International Protection:IP66;
- ◆ For Outdoor LED lights;
- ◆ 5 Years Warranty;



SELV



CE CB IP66



Model List:

Model	Certification	Output Voltage	Output Current(Max)	Output Power(Max)	Efficiency
FS42W-16C2600	CB/CE	10-16V	2600 mA	41.6W	85%
FS42W-20C2100	CB/CE	12-20V	2100 mA	42W	86%
FS42W-24C1750	CB/CE	14-24V	1750 mA	42W	87%
FS42W-36C1200	UL/CUL/CB/CE/FCC	22-36V	1200 mA	43.2W	88%
FS42W-42C1000	UL/CUL/CB/CE/FCC	26-42V	1000 mA	42W	89%
FS42W-42C0900	UL/CUL/CB/CE/FCC	26-42V	900 mA	37.8W	89%
FS42W-48C0875	CB/CE	29-48V	875 mA	42W	89%
FS42W-54C0750	CB/CE	33-54V	750 mA	40.5W	89%

Revision History:

Change Date	Rev:	Before Change	After Change
2017/06/03	1.0	/	Datasheets Release
2017/07/14	2.0	-30-70℃	-40-60℃
2017/12/09	2.1		Add modulation and output frequency

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA

Tel: +86-769-89175055; Fax:+86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com

Website: <http://www.towin-driver.com/>



FS42W Series LED Driver

Input: 100-277VAC High Power Factor High efficiency IP66 UL CB CE

Electrical Specifications:

1. Input Specifications

Parameter	Notes	Min.	Typ.	Max.	Unit
Input Voltage Range		90		305	Vac
Input Frequency Range		47		63	HZ
Input AC Current	100%Load at 115V Input			0.45	A
Inrush Current	100%Load at 230V Input Cold start			20	A
Power Factor	70%-100%Load at100-277V Input	0.9			
THD	70%-100%Load at100-277V Input			20%	

2. Output Specifications

Parameter	Notes	Min.	Typ.	Max.	Unit
Output Voltage	Load at 100-277V Input	60%		100%	
	No-load at 100-277V Input			110%	
Line Regulation	60%-100%Load at100-277V Input	-5%		+5%	
Load Regulation	60%-100%Load at100-277V Input	-5%		+5%	
Current deviation	60%-100%Load at100-277V Input	-5%		+5%	
Output frequency	100%Load at120V 60HZ Input		120		HZ
Output current modulation	100%Load at120V 60HZ Input			30%	
Starup Overshoot Current	100%Load at LED load			10%	
Efficiency	100%Load at 120V Input		88%		
Turn-on Delay Time	100%Load at120V Input(Oscilloscope)			1000	ms

3. Environment Features

Parameter	Notes	Min.	Typ.	Max.	Unit
Operating TEMP. range		-30		70	°C
Storage TEMP. Range		-40		85	°C
International Protection:			IP66		
Case TEMP. (Tc) (2)	When Ta=60°C			85	°C

Notes:

1. Test sample model: FS42W-36C1200
2. Refer to operating temperature derating curve.
3. Refer to mechanical

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA

Tel: +86-769-89175055; **Fax:**+86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com

Website: <http://www.towin-driver.com/>



FS42W Series LED Driver

Input: 100-277VAC High Power Factor High efficiency IP66 UL CB CE

4. Safety Features

Parameter	Notes	Min.	Typ.	Max.	Unit
Leakage Current	L,N To OUTPUT 25°C 70%RH			0.5	mA
Withstand Voltage	L,N To OUTPUT 25°C 70%RH	3750			Vac
Insulation Resistance	Iput To Output (500Vdc 25°C 70%RH)	10			MΩ

5. Protection Functions

Parameter	Notes	Protection Performance
Over Voltage Protection	When the load voltage exceeds 1.2 times the rated voltage	Shutdown and reboot
Over Load Protection	When the load power exceeds 1.2 times the rated power	Shutdown and reboot
Short Circuit Protection	When the output is shorted	Shutdown and reboot
Over Temperature Protection	When the case temperature is over 120°C	Shutdown

6. Product Specifications

Parameter	Notes	Protection Performance
Size	80.5*63*26mm	
Weight	215g	
Color	White	
MTBF	200000Hours	TA=25°C (MIL-HDBK-217F)
Life Time	When Tc<80°C Life Time>50000Hours	

7. Safety Certification

Safety Category	Standard
UL/CUL	UL8750,UL1310,CAN/CSA C22.2 No.223 M91,CAN/CSA-C22.2 No.250.13-12
CE	EN61347-1:2008+A1,EN61347-2-13:2006,EN62493:2010
CB	IEC61347-1:2007+A1,IEC61347-2-13:2006

8. Electromagnetic Compatibility

EMI	Notes
EN55015B	Conducted Emission Test & Radiated Emission Test
EN61000-3-2	Harmonic current emissions
EN61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS	Notes
EN61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN61000-4-4	Electrical Fast Transient / Burst-EFT: Level 3, Criteria A
EN61000-4-5	Surge Immunity Test: AC Power Line: Line to Line 4 kV Line to GND 6KV
EN61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN61000-4-8	Power Frequency Magnetic Field Test
EN61000-4-11	Voltage Dips
EN61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA



Tel: +86-769-89175055; Fax: +86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com


Website: <http://www.towin-driver.com/>

Curve Feature:


1, Derating curve

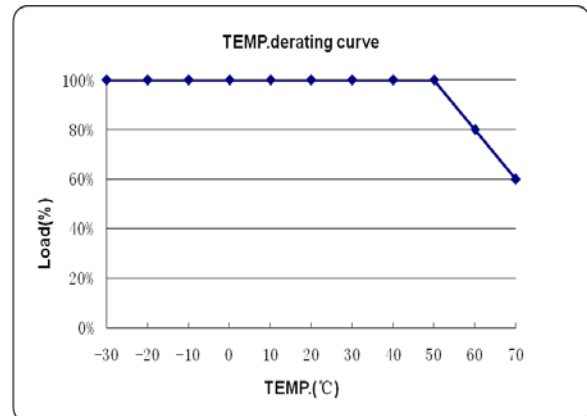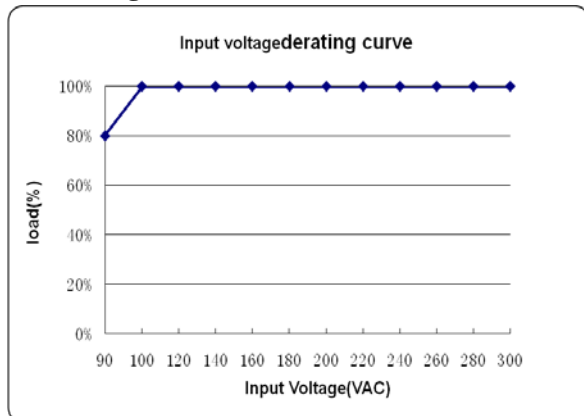

2, Life curve

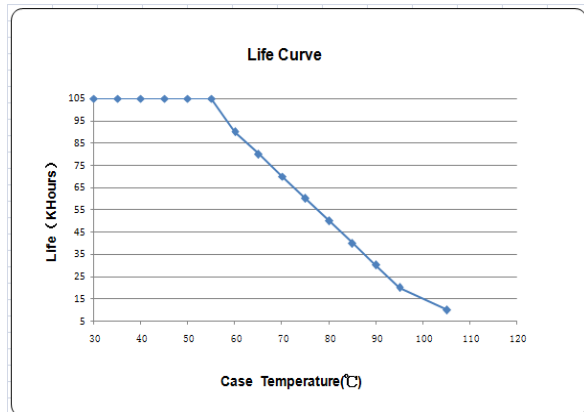

Mechanical:

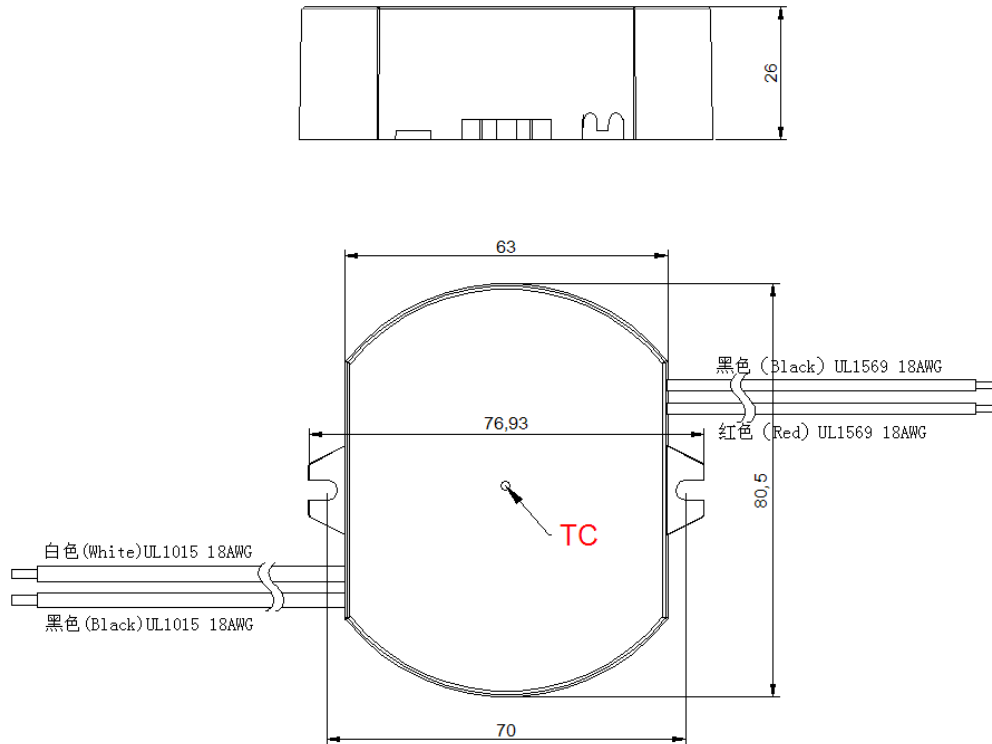

0

Parameter	Cable Specifications	Standard length	Remark
AC cable	UL1015 18AWG		Length can be customized
DC cable	UL1569 18AWG		