

## SPECIFICATIONS

### Product Features:

- ◆ Input Voltage Range:100~277VAC;
- ◆ High Power Factor;
- ◆ Efficiency Up to 93%;
- ◆ Meet UL8750 CB CE;
- ◆ International Protection:IP66;
- ◆ For Outdoor LED lights;
- ◆ 5 Years Warranty;



### Model List:

Model	Certification	Output Voltage	Output Current(Max)	Output Power(Max)	Efficiency
HB100W-66C1500	UL/CUL/CB/CE/SAA/FCC	40-66V	1500mA	99W	93%
HB100W-66CXXXX xxxx are 4 digits from 50 to 1500, which indicates output current in mA. For example, 1500 represents output current 1500mA;					

### Revision History:

Change Date	Rev:	Before Change	After Change
2017/06/03	1.0	/	Datasheets Release
2017/07/14	2.0	-30-70 °C	-40-60 °C
2017/12/09	2.1		Add modulation and output frequency

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA

Tel: +86-769-89175055; Fax:+86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com

Website: <http://www.towin-driver.com/>



## HB100W Series LED Driver

Input: 100-277VAC High Power Factor High efficiency For high bay light IP66 UL CB CE

### Electrical Specifications:

#### 1. Input Specifications

Parameter	Notes	Min.	Typ.	Max.	Unit
Input Voltage Range		90		305	Vac
Input Frequency Range		47		63	HZ
Input AC Current	100%Load at 115V Input			1.1	A
Inrush Current	100%Load at 230V Input Cold start			20	A
Power Factor	70%-100%Load at100-277V Input	0.9			
THD	70%-100%Load at100-277V Input			20%	

#### 2. Output Specifications

Parameter	Notes	Min.	Typ.	Max.	Unit
Output Voltage	Load at 100-277V Input	60%		100%	
	No-load at 100-277V Input			120%	
Line Regulation	60%-100%Load at100-277V Input	-5%		+5%	
Load Regulation	60%-100%Load at100-277V Input	-5%		+5%	
Current deviation	60%-100%Load at100-277V Input	-5%		+5%	
Output frequency	100%Load at120V 60HZ Input		120		HZ
Output current modulation	100%Load at120V 60HZ Input			40%	
Starup Overshoot Current	100%Load at LED load			10%	
Efficiency	100%Load at120V Input		93%		
Turn-on Delay Time	100%Load at120V Input(Oscilloscope)			1000	ms

#### 3. Environment Features

Parameter	Notes	Min.	Typ.	Max.	Unit
Operating TEMP. range		-30		70	°C
Storage TEMP. Range		-40		85	°C
International Protection:			IP66		
Case TEMP. (Tc) (2)	When Ta=60°C			90	°C

Notes:

- 1, Test sample model:HB100W-66C1500
- 2, Refer to mechanical

**DongGuan Towin Optoelectronic Co., Ltd**

**Address:** Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA

**Tel:** +86-769-89175055; **Fax:**+86-769-89175066;

**E-mail:** cathy@towin-driver.com; sales@towin-driver.com

**Website:** <http://www.towin-driver.com/>



## HB100W Series LED Driver

Input: 100-277VAC High Power Factor High efficiency For high bay light IP66 UL CB CE

### 4. Safety Features

Parameter	Notes	Min.	Typ.	Max.	Unit
Leakage Current	L,N To GND 25°C 70%RH			1	mA
Withstand Voltage	L,N To GND 25°C 70%RH	2200			Vdc
Grounding Continuity	GND Line To Case at 25A 25°C 70%RH			100	mΩ

### 5. Protection Functions

Parameter	Notes	Protection Performance
Over Voltage Protection	When the load voltage exceeds 1.2 times the rated voltage	Auto Restart
Over Load Protection	When the load power exceeds 1.2 times the rated power	Auto Restart
Short Circuit Protection	When the output is shorted	Reduce frequency mode
Over Temperature Protection	When the case temperature is over 120°C	Shutdown

### 6. Product Specifications

Parameter	Notes	Protection Performance
Size	Φ130*65mm	
Weight	700g	
Color	Black	
MTBF	200000Hours	TA=25°C (MIL-HDBK-217F)
Life Time	When Tc<85°C Life Time>50000Hours	

### 7. Safety Certification

Safety Category	Standard
UL/CUL	UL8750,UL1012,
CE	EN61347-1:2008+A1,EN61347-2-13:2006,EN62493:2010
CB	IEC61347-1:2007+A1,IEC61347-2-13:2006

### 8. Electromagnetic Compatibility

EMI	Notes
EN55015B	Conducted Emission Test & Radiated Emission Test
EN61000-3-2	Harmonic current emissions
EN61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS	Notes
EN61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN61000-4-4	Electrical Fast Transient / Burst-EFT: Level 3, Criteria A
EN61000-4-5	Surge Immunity Test: AC Power Line: Line to Line 4 kV Line to GND 6KV
EN61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN61000-4-8	Power Frequency Magnetic Field Test
EN61000-4-11	Voltage Dips
EN61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA



Tel: +86-769-89175055; Fax: +86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com


Website: <http://www.towin-driver.com/>

### Curve Feature:


#### 1, Derating curve

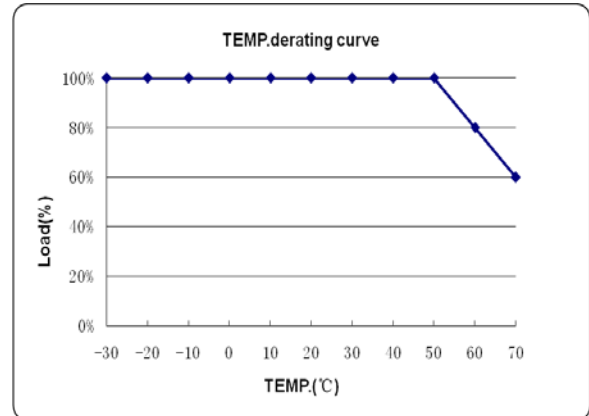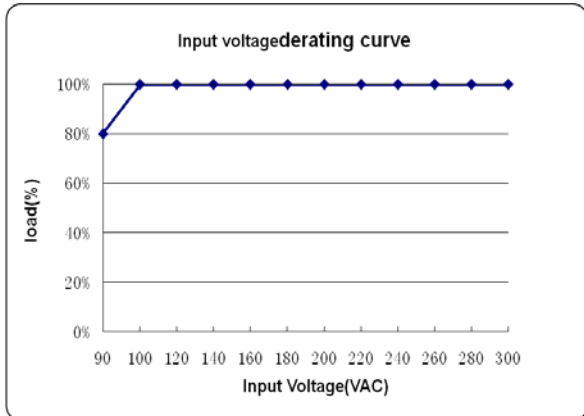

#### 2, Life curve

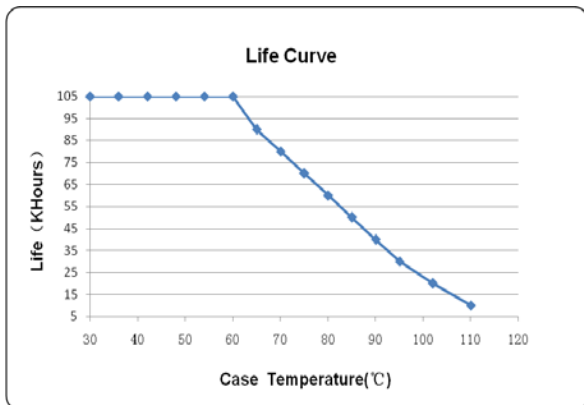

**Mechanical:**

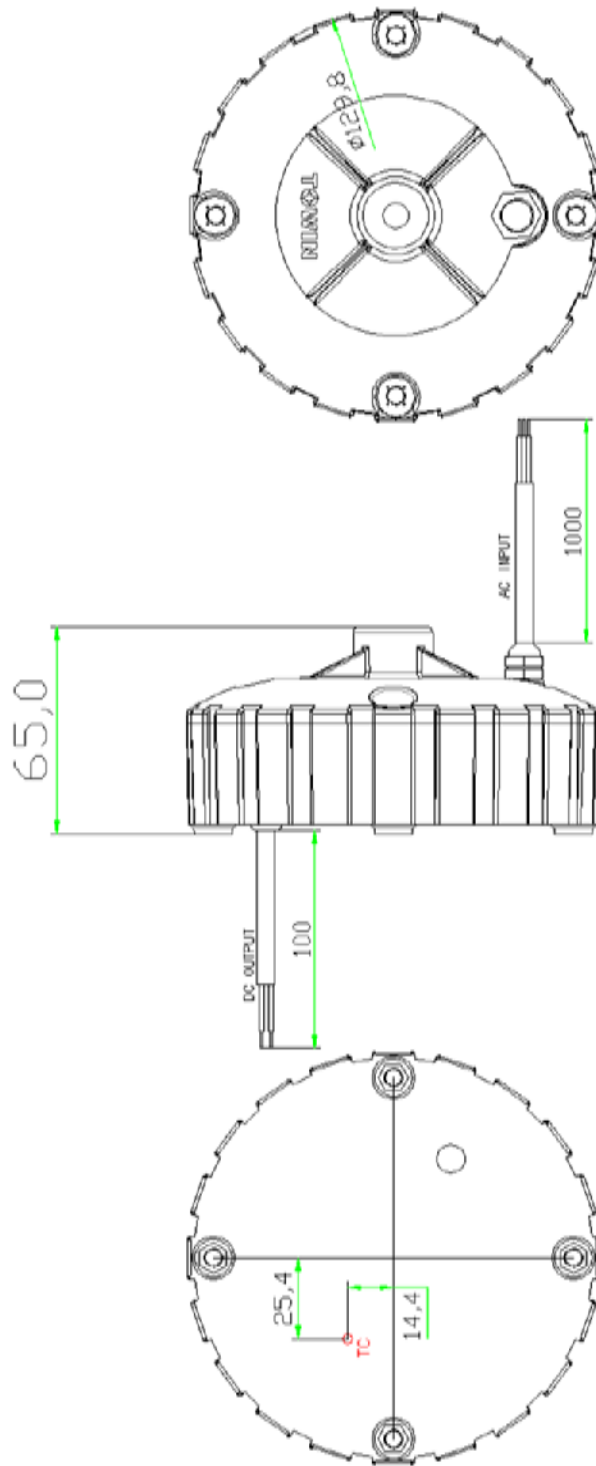

Parameter	Cable Specifications	Standard length	Remark
AC cable	VDE H05RN 1.0mm <sup>2</sup>	L=1000MM	Length can be customized
DC cable	UL SVT 18AWG	L=100MM	

DongGuan Towin Optoelectronic Co., Ltd

Address: Liuxing Rd 1 Liujia Industry Hengli Town, Dongguan, Guangdong 523473 P.R. CHINA

Tel: +86-769-89175055; Fax: +86-769-89175066;

E-mail: cathy@towin-driver.com; sales@towin-driver.com

Website: <http://www.towin-driver.com/>